


32" Wall-Mount Kiosk

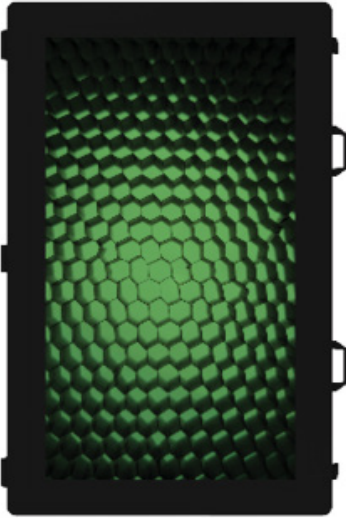

MetroClick's Capacitive Touch Monitors have a modern sleek look with its flat edge to edge glass IP65 water- and dust proof front panels. This device has capacitive 10-finger multitouch (40-finger for 86" device), glass front reaching MoS₂ 7, the glass surface is anti-glare treated (chemical etching) and a wide variety of connectors. All the monitors have VESA 75 or VESA 100 screw patterns on the back, while the 13.3" to 21.5" come with their own desktop stand included. This device has an optically bonded touch panel, which will improve the stability, reduce the reflection, increase the viewing angle, and enhance the perceived brightness. It also provides resistance to dust particles and shows a better image in general. These devices are the perfect choice for a wide variety of applications, including POS systems, control panels in industrial fields, kiosk systems, office/residence automation, digital signage and in areas like shopping malls, classrooms, hotels and many more.

Features

- Integrated 4K Camera
- Dual-sided Screen
- 10-Point Multi Touch
- Vandal proof glass
- IP67 Rated
- Optically bonded

Product Details

Product name: 32" Wall Mount IP65 Capacitive
Touch Monitor
FT65WMCAPHBOBIP65

LCD Panel

Screen diagonal (Inch/cm) 65/165.10
Display active screen size (cm) 142.85×80.35
Aspect ratio 16:9
Physical resolution 3840×2160
Maximum showable resolution 3840×2160
Colours displayed 1.07 billion
Brightness (cd/m2) 1000
Contrast 4000:1
Typical reaction time Tr/Tf (ms) 8/1
Visual Angle horizontal/vertical (°) 178/178
Backlight / Backlight Lifetime (hours) LED / 100,000

Touch Panel

Touch Technology Projected Capacitive 10-point Multitouch
Touch Panel Drivers Windows; Linux; Mac; Android
Touch Life (Contacts) Unlimited
Surface Hardness 7H
Surface Treatment Anti glare (chemically etched)

Operation / Mechanical

Operating Temperature (°C) -10-+60
Humidity Range (RH) 10%-90%
Net weight (kg) 81.00
Gross weight (kg) 159.00 (incl. Flight Case)
Housing material Aluminum
Housing (mm) 1640.0 × 250.3 × 1023.0

Power

Power Supply 100-240V ACDC active switching;
24V DC-Out
Working Power (V) 24
Power Consumption (W) 150
Stand-By Consumption (W) <1

External Connectors

Video 1× VGA, 1× DVD-D, 1× HDMI 1.3 (incl. HDCP)
Audio 1× PC-Audio
Touch Connector 1× USB
Connector 1× 24V DC-In

Included Accessories

Power Supply (see Power section)
Cables - USB Touch, Audio Cable, HDMI