


## *55" Wall-Mount Kiosk*

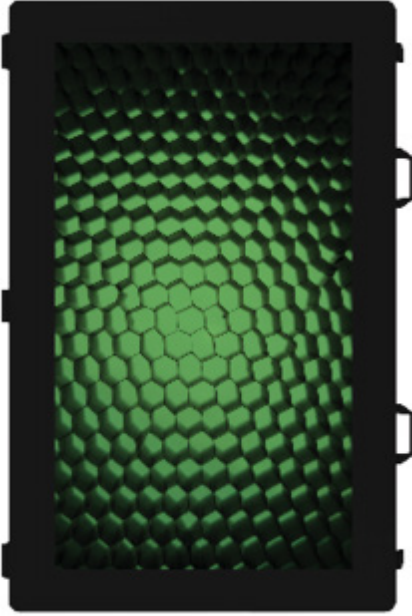

MetroClick's Capacitive Touch Monitors have a modern sleek look with its flat edge to edge glass IP65 water- and dust proof front panels. This device has capacitive 10-finger multitouch (40-finger for 86" device), glass front reaching MoS<sub>2</sub> 7, the glass surface is anti-glare treated (chemical etching) and a wide variety of connectors. All the monitors have VESA 75 or VESA 100 screw patterns on the back, while the 13.3" to 21.5" come with their own desktop stand included. This device has an optically bonded touch panel, which will improve the stability, reduce the reflection, increase the viewing angle, and enhance the perceived brightness. It also provides resistance to dust particles and shows a better image in general. These devices are the perfect choice for a wide variety of applications, including POS systems, control panels in industrial fields, kiosk systems, office/residence automation, digital signage and in areas like shopping malls, classrooms, hotels and many more.

---

### *Features*

- Integrated 4K Camera
- Dual-sided Screen
- 10-Point Multi Touch
- Vandal proof glass
- IP67 Rated
- Optically bonded

### **Product Details**

Product name: 55" Wall Mount IP65 Capacitive  
Touch Monitor  
FT55WMCAPHBOBIP65

### **LCD Panel**

Screen diagonal (Inch/cm) 55/138.8  
Display active screen size (cm) 121.00×68.00  
Aspect ratio 16:9  
Physical resolution 1920×1080  
Maximum showable resolution 1920×1200  
Colours displayed 16.7M  
Brightness (cd/m2) 1000  
Contrast 3000:1  
Typical reaction time Tr/Tf (ms) 4/4  
Visual Angle horizontal/vertical (°) 178/178  
Backlight / Backlight Lifetime (hours) LED / 60,000

### **Touch Panel**

Touch Technology Projected Capacitive 10-point Multitouch  
Touch Panel Drivers Windows; Linux; Mac; Android  
Touch Life (Contacts) Unlimited  
Surface Hardness 7H  
Surface Treatment Anti glare (chemically etched)

### **Operation / Mechanical**

Operating Temperature (°C) -10-+60  
Humidity Range (RH) 10%-90%  
Net weight (kg) 71.00  
Gross weight (kg) 159.00 (incl. Flight Case)  
Housing material Aluminum  
Housing (mm) 1436.5 × 162.0 × 906.5

### **Power**

Power Supply 100-240V ACDC active switching;  
24V DC-Out  
Working Power (V) 24  
Power Consumption (W) 96  
Stand-By Consumption (W) <1

### **External Connectors**

Video 1x VGA, 1x DVD-D, 1x HDMI 1.3 (incl. HDCP)  
Audio 1x PC-Audio  
Touch Connector 1x USB  
Connector 1x 24V DC-In

### **Included Accessories**

Power Supply (see Power section)  
Cables - USB Touch, Audio Cable, HDMI